

ISOLAMENTO / INSULATION

Poliuretano espanso alta densità 40-42 kg/m³ autoestinguente.

High density polyurethane foam 40-42 kg/mc fire retarding.


RIVESTIMENTO PANNELLI / PANEL FINISHING

Liscio o micro nervato, zinco preverniciato anche in differenti colori, zincoplastificato, inox grezzo o plastificato.


Smooth or micro ribbing, galvanised sendzimir sheet steel standard white or other RAL color on demand, plastic coated, AISI304 stainless steel sheet or AISI304 stainless sheet steel plastic coated.




SPessori / THICKNESSES

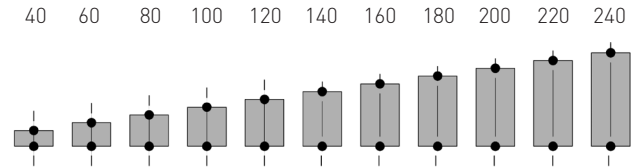


GIUNTO A INCASTRO / OVERLAPPING JOINT




SOSPENSIONE SOFFITTO / ROOF SUSPENSION




GIUNTO SCHIUMATO / FOAMED JOINT



GIUNTO VERTICALE / VERTICAL JOINT



GIUNTO ORIZZONTALE / HORIZONTAL JOINT



PAVIMENTO / FLOOR

